


Transportbügel / Anschlagpunkt in Schraubausführung GK 8



Bestell-Nr.	Tragfähigkeit [t]	Schrauben		Abmessungen									Gewicht ca. [kg]
		Gewinde	[Nm]	a [mm]	b [mm]	c [mm]	Ød [mm]	e [mm]	f [mm]	g [mm]	h [mm]	l [mm]	
Lieferumfang komplett mit Schrauben													
21430010	3,15	M 20 x 45	210	12	56	50	18	34	130	90	21	51	1,08
21430011	5,30	M 24 x 55	290	15	67	60	22	42	160	110	25	63	2,04
21430012	8,00	M 27 x 65	550	20	80	70	26	55	190	130	28	67	3,58
Lieferumfang ohne Schrauben													
21430020	3,15		210	12	56	50	18	34	130	90	21	51	1,08
21430021	5,30		290	15	67	60	22	42	160	110	25	63	2,04
21430022	8,00		550	20	80	70	26	55	190	130	28	67	3,58

Tragfähigkeiten

Anschlagart								
	Stück	1	2	2	2	3 oder 4	3 oder 4	
Neigungswinkel	0°	0°	0° - 45°	45° - 60°	0° - 45°	45° - 60°		
	[t]	[t]	[t]	[t]	[t]	[t]	[t]	
21430010	4,75	9,50	4,25	3,15	6,30	4,75		
21430011	8,00	16,00	7,10	5,30	11,20	8,00		
21430012	12,00	24,00	11,20	8,00	16,00	12,00		

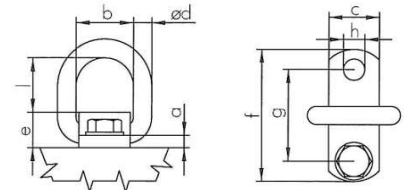

NEUMANN GMBH
Hebesysteme Fördertechnik

Paul-Ehrlich-Straße 5a
63128 Dietzenbach

Tel. 06074 8504-0
Fax 06074 850412

E-Mail info@neumann-gmbh.com
www.neumann-gmbh.com