


Anschlagseil endlos Grummet EN 13414-3

Nennfestigkeit 1770 N/mm²

Faserseele, verzinkt

Bestell-Nr.	Tragfähigkeit einfach direkt [t]	Seil-Machart	Seil-Ø [mm]
22360009	1,15	7x6x7+FC	9
22360012	2,00	7x6x7+FC	12
22360015	3,20	7x6x7+FC	15
22360018	4,60	7x6x19+FC	18
22360021	6,30	7x6x19+FC	21
22360024	8,25	7x6x19+FC	24
22360025	10,5	7x6x19+FC	27
22360026	11,5	7x6x19+FC	30
22360027	14,0	7x6x37+FC	33
22360028	16,5	7x6x37+FC	36
22360029	19,5	7x6x37+FC	39
22360030	22,5	7x6x37+FC	42
22360031	30,0	7x6x37+FC	48
22360032	37,5	7x6x37+FC	54
22360033	46,0	7x6x37+FC	60
22360034	60,0	7x6x37+FC	66
22360035	72,5	7x6x37+FC	72
22360036	76,0	7x6x37+FC	78
22360037	98,0	7x6x37+FC	84
22360038	117,0	7x6x37+FC	96

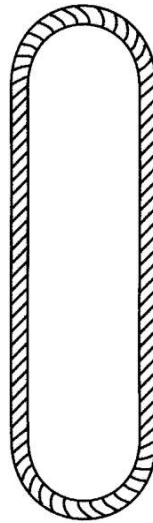

Stahlseele, verzinkt

22360102	14,0	7x6x36+WC	30
22360104	17,0	7x6x36+WC	33
22360106	20,0	7x6x36+WC	36
22360108	23,5	7x6x36+WC	39
22360110	27,0	7x6x36+WC	42
22360112	35,5	7x6x36+WC	48
22360114	45,0	7x6x36+WC	54
22360116	55,5	7x6x36+WC	60
22360118	69,0	7x6x36+WC	66
22360120	84,0	7x6x36+WC	72
22360122	102,0	7x6x36+WC	78
22360124	121,0	7x6x37+WC	84

Andere Macharten und höhere Tragfähigkeiten auf Anfrage.

NEUMANN GMBH
Hebesysteme Fördertechnik

Paul-Ehrlich-Straße 5a
63128 Dietzenbach

Tel. 06074 8504-0
Fax 06074 850412

E-Mail info@neumann-gmbh.com
www.neumann-gmbh.com