

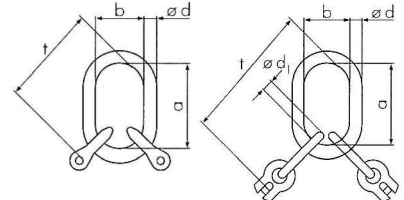


Aufhängekopf GK10, Normalausführung

Bestell-Nr.	Kette Ø [mm]	Trag- fähigkeit [t]	Abmessungen				Gewicht ca. [kg]
			a [mm]	b [mm]	Ød [mm]	t [mm]	
1-strängig							
21800656	6	1,40	110	60	13	140	0,60
21800658	8	2,50	110	60	16	151	0,90
21800660	10	4,00	135	75	18	186	1,40
21800663	13	6,70	160	90	22	223	2,40
21800666	16	10,00	180	100	26	258	4,00
21800668	18	12,50	200	110	32	289	6,20
21800672	22	19,00	260	140	36	364	9,90
2-strängig							
21800706	6	2,00	110	60	13	140	0,70
21800708	8	3,55	135	75	18	176	1,40
21800710	10	5,60	160	90	22	211	2,40
21800713	13	9,50	180	100	26	243	4,00
21800716	16	14,00	200	110	32	278	7,05
21800718	18	18,00	260	140	36	349	11,00
21800722	22	26,50	340	180	45	444	20,50
3+4-strängig							
21800806	6	3,00	135	75	18	219	1,70
21800808	8	5,30	160	90	22	271	3,20
21800810	10	8,00	180	100	26	316	5,30
21800813	13	14,00	200	110	32	378	9,30
21800816	16	21,20	260	140	36	478	16,30
21800818	18	26,50	340	180	45	579	28,10
21800822	22	40,00	350	190	50	624	40,50



NEUMANN GMBH
Hebesysteme Fördertechnik

Paul-Ehrlich-Straße 5a
63128 Dietzenbach

Tel. 06074 8504-0
Fax 06074 850412

E-Mail info@neumann-gmbh.com
www.neumann-gmbh.com